


# **EPA-NGFW-M500 Series**

**Next Generation Firewall** 





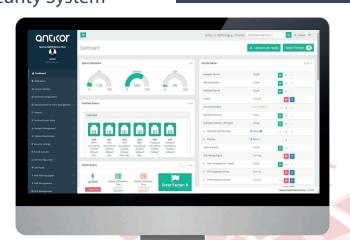

The Antikor Integrated Cyber Security System EPA-NGFW-M500 Series Next-Generation Firewalls (NGFW) is a product that ensures the security of Small Enterprise networks with advanced security functions. It incorporates a Policy/Section Structure, Virtual Wire, Online and Offline Updates, IPsec VTI and TS Mode, HTTP API, and many other advanced features. It comes with all these features enabled out of the box and does not require a license.

## Security

The Antikor NGFW product ensures the security of your network with advanced security functions. It provides maximum Independent security through an Management Port (reserved processor, separate Control Plane and Data Plane) and an Independent Cluster Port.

### **Performance**

While executing security functions, it operates your network with maximum performance. Thanks to its robust network stack, it easily and efficiently meets the security and network needs of your enterprise network.

### Network

antikor -The Antikor NGFW product provides high-performance solutions with rich network features ranging from Layer 2 to Layer 7. It ensures full compatibility with your network through configuration flexibility. It strengthens your network with its security functions, enhancing overall network security.

You can centrally manage the Antikor NGFW products deployed in your organization through Centralized Firewall Management (CFWM). It allows you to gather logs from multiple devices and perform centralized logging (CLM), enabling you to query and analyze the collected logs from a single point.





Mersin Universitesi Ciftlikkoy Kampusu Teknopark Idari Binasi Kat: 4 No: 411 Zip Code: 33343 Yenisehir / MERSIN / TURKIYE







# **EPA-NGFW-M500 Series**

# **Product Specifications**





Operating Modes	
OSI Layer 2 Transparent	
OSI Layer 3 Routing + Stealth Mode	
Virtual Wire	

Rou	ıti	ng

IPv4 / IPv6 Static Routing
Policy Based Routing (PBR)
OSPF - Open Shortest Path First Protocol
BGP - Border Gateway Protocol
RIP / RIPng - Routing Information Protocol
PIM SM/SSM IGMP v2/v3 Multicast Routing
Routing Monitor

### **Network Interface Specifications**

Loopback Interface, IEEE 802.1Q VLAN suppor
Link Aggregation:
LACP Failover Load Ralance Round Robin

LACP, Failover, Load Balance, Round Robin
Bridging / STP / Ethernet Bypass
Virtual Extensible LAN (VXLAN)
NAT64, IPv6 6to4 Tunneling
Static ARP
PPP ve PPPoE Connection Interface

## 3G/4G/LTE Modem Support

Security Specifications
Zone Based Firewall
Application Security (ApplD)
Honeypot Trapping
Traffic Rate Limiting
Multi-Policy, Section and Profile Support
Time Based Security Policy Management
IPS - Intrusion Detection and Prevention
SPI - Statefull Packet Inspection

SPI - Statefull Packet Inspection
DPI - Deep Packet Inspection
http / https Web Filtering (SNI / DPI)
DNS Query Filtering
Intf. Base Anti Spoof(Symmetrical and Asymmetrical
MAC Based Quarantine

MAC - IP Matching Control
ARP Poisoning Protection
Flood Intrusion Prevention
Anti Botnet

Gateway Anti Virüs / Anti Malware ***	e
SSH Inspection	
DoS Prevention - Connection Limiting	

XFF Scan - Trusted Proxy Servers

### Service Based Timeout Control

Liliali Security
Gateway Antispam ***
 Anti Virus / Anti Malware ***
 Email Rate Limiting
 RBL, MX, SPF, DKIM, DMARC Check
 Email Quarantine
 Gray Listing, Phishing Check
 Category and Rule Based Filtering

VPN - Virtual Private Network
SSL VPN
Certificate Verification
User Credentials Verification (+ 2FA)
Authentication:
BLAKE2*, RSA*, SHA*, MD*, SHAKE*
Encryption:
AES*, ARIA*, CAMELLIA*, SEED*, SM4*
PPTP / L2TP VPN
IPsec VPN (Both VTI and Legacy Mode)
Site to Site VPN
GRE Tunnelling
IPsec VPN

-
4
Н
_
_
_
_

PKI - Public Key Infrastructure Support

PSK - Pre Shared Key Support
Services
Live Dashboard
Automated Update System
Offline Update
Automatic Configuration Backup
DHCPv4/v6 Server, Relay and Monitor
Authenticated http/https Proxy
Antikor® Shared Management-Virtual System
QoS - Effective Bandwidth Management
Time and Quota Adjustable Hotspot(Captive)
Bandwidth Monitor
Antikor® Registry Service
Antikor® Announcement Service
NetFlow Export Service
RADIUS Server and Proxy
Domain Based http/https Forwarding
https SSL Offload Service
SNMP v2/v3 Service

RRD Servic	e
Number	of Active Users and Bandwidth
http/https	Caching
Domain Ba	sed Bandwidth Limiting
Log Timest	amping
TUBITAK Ka	amu SM - Timestamp Integratior
Syslog (TCF	P/UDP/TLS) - supported formats;
RAW, CEF	, EWMM, GELF, JSON, WELF, CIM
Black Hole	Service

Black Hole Service
 Campus Information Service
 LLDP Service
 GEO-IP Service
 Antikor Central Management Integration and
Antikor Center Logging Integration

System Performance	M500A / M500B
NGFW Throughput (IMIX)	500 Mbps
IPS Throughput (IMIX) ***	550 Mbps
Firewall Throughput	2 Gbps
Number of Concurrent Sessions (Million)	0,5M / 1M
IPsec VPN Throughput (Total)	350 Mbps
SSL VPN Throughput (Total)	150 Mbps
Hannelon	

SSL VPN Throughput (Total)	150 Mbps
Licensing	
Out of Band Cluster(HA) Support	Active-Passive
Number of Addressable CPU Threads	6
Number of IPsec VPN Tunnels	64
Number of SSL VPN Users	256
Number of WAN / LAN / DMZ Interfaces	2/3/1

management interface reatures		
HTML5 Responsive Web Interface		
SSL Certificate based authentication		
2FA - Two-Factor Authentication		
Customizing the Service Port		
Out of Band Management Plane		
Resource Reservation		
SSH Console		

Physical Console (Monitor, Keyboard)	
Serial Console (If exists on hardware)	
Incident Notification Service	
SMS, Email, Brower Notification	

	Authentication Methods
	Mernis
	SMS
•••	Local User
	HTTP (API)
ï	LDAP
	RADIUS
•	POP3 / IMAP
	SSO: Negotiate Kerberos - Active Directory
	TACACS +

<b>Product</b>	Cartifi	cations
rivuuct	CELUII	cativiis

	Common Criteria EAL4 +
١	TRtest Product Conformity Certificate
	100% Turkish Product

### **Minimum Requirements**

-	Min 8 Core Processor	
1	Min 16 GB Ram	
	Min 500GB Solid State Disk	
1	MultiQueue Ethernet Card	

* Performance tests are	performed with	ı the following	hardware
- Intel Atom C-3758 P	rncessor		

- IIII - 111161 ALOIII C-3/36 PTOCESSOI	
- Dual Channel 16 GB DDR4 2400MHz ECC RAM	
Intal i250 MultiQuaga Etharnat Card	

<sup>\*\*</sup> All performance values may vary depending on environmental condiditions, system configuration and equipment.

eP-FR-79 Rev.02 / Release date: 01.04.2019 / Rev.date: 02.05.2021



Mersin Universitesi Ciftlikkoy Kampusu Teknopark Idari Binasi Kat: 4 No: 411 Zip Code: 33343 Yenisehir / MERSIN / TURKIYE





<sup>\*\*\*</sup> These features require a minimum of 8 GB or more of memory.